

ML.G.344
ML.G.346



Anchor Shackles

Manilles de forme lyre

High Tensile forged
steel quenched and
tempered

Acier forgé
haute résistance

U.S. Federal Specification (RR-C-271)

Safety factor = 6 up to 85 T. Above S.F. = 5


From W.L.L.120 T. : Bolt with straight head & handle grip.

Pins : orange paint

Finish : Galvanized up to W.L.L.120 T.
and Galva paint from W.L.L.150 T.

From W.L.L.2 T. up to 85 T. : High Tensile Steel
From W.L.L.120 T. and above : Alloy Steel

Tolérances de forge $\pm 5\%$
Forging tolerances $\pm 5\%$

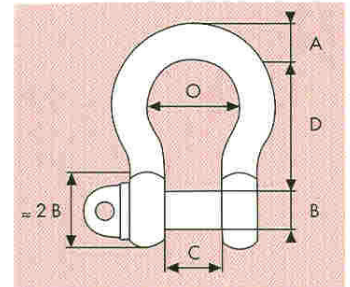

ML.G.344

Screw pin anchor shackles meet
Federal Specification RR-C-271.



ML.G.346

Bolt type anchor shackles with thin head
bolt-nut, with cotter pin..RR-C-271

W.L.L. M.T.	SIZE A		B	C	D	O	in kg	
	inches	mm					ML G 344	ML G 346
2.000	.1/2	13	16	22	51	32	0.360	0.440
3.250	.5/8	16	19	27	64	43	0.620	0.790
4.750	.3/4	19	22	31	76	51	1.210	1.260
6.500	.7/8	22	25	36	83	58	1.480	1.880
8.500	1.	25	28	43	95	68	2.500	2.790
9.500	1. 1/8	28	32	47	108	75	3.465	3.800
12.000	1. 1/4	32	35	51	115	83	4.500	5.260
13.500	1. 3/8	35	38	57	133	92	6.600	7.000
17.000	1. 1/2	38	42	60	146	99	7.150	8.800
25.000	1. 3/4	45	50	74	178	126	13.240	15.000
35.000	2.	50	57	83	197	138	19.000	20.650
42.500	2. 1/4	57	65	95	222	160	28.000	29.300
55.000	2. 1/2	65	70	105	254	180	38.500	41.000
85.000	3.	75	80	127	330	190	62.300	64.500
120.000	3. 1/2	89	95	146	381	238		109.500
150.000	4.	102	108	165	400	275		160.000
200.000	4. 3/8	120	130	175	500	290		235.000
250.000	4. 3/4	125	140	200	540	305		285.000
300.000	5. 1/8	135	150	200	600	305		340.000
400.000	5. 7/8	165	175	225	650	325		570.000
500.000	6. 3/4	175	185	250	700	350		685.000
600.000	7. 1/2	195	205	275	700	375		880.000
700.000	7. 7/8	205	215	300	730	400		980.000
800.000	8. 1/4	210	220	300	730	400		1110.000
900.000	8. 21/32	220	230	320	750	420		1295.000
1.000.000	9.	230	240	340	750	420		1475.000
1.200.000	9.27/32	250	280	400	840	500		1900.000
1.500.000	10.1/4	260	325	460	870	600		2800.000



STEEL FORGINGS MANUFACTURE
FOR MARINE - INDUSTRY & OFFSHORE
7, boulevard Louis-Nail - C.P. 19
56326 LORIENT Cedex - FRANCE
Tél. 33 2 97 37 22 00
Fax 33 2 97 37 12 15
E-mail : info@le-beon.com
http://www.lebeon.com

(For other dimensions, refer to us - *Autres dimensions : nous consulter*)